

FLOODED HIGH TEMPERATURE BATTERY

36B24RSHT (12V32Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	32Ah
Reserve Capacity	47min
Cold Cranking Amps@0°F (-18°C)	270A
Dimension	Length
	236mm(9.29inches)
	Width
Dimension	Height
	222mm(8.74inches)
Approx Weight	10.4kg(22.9lbs)
Terminal	1
Cell layout	1
Hold-Down	B0
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS1

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

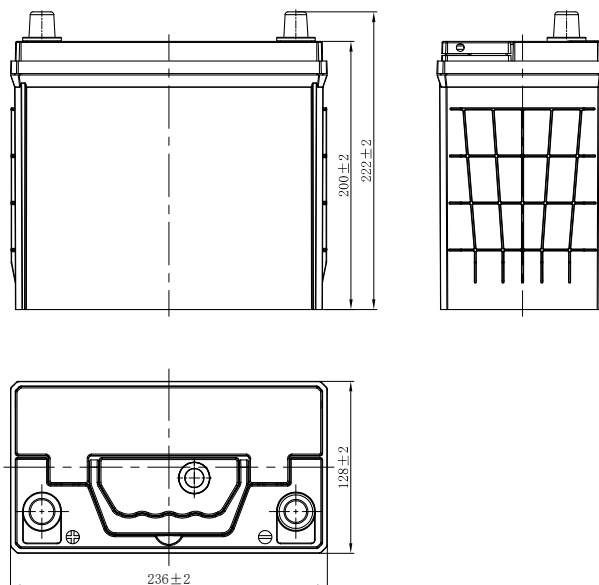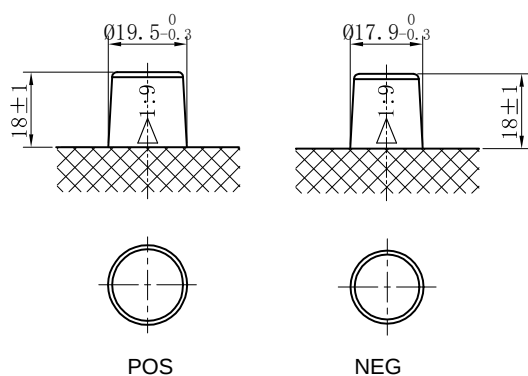

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-36B24RSHT-PD-EN-V1.0-20251022