


MAINTENANCE-FREE MOTORCYCLE BATTERY

EB8E-3(J) (12V8Ah)

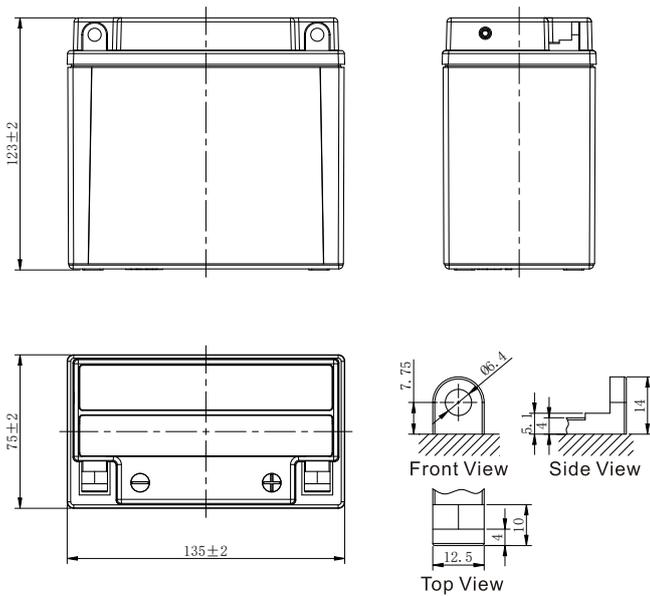

GENERAL FEATURES


- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

*Values are subject to variation of +/- 5% in normal manufacturing processes.

CHARACTERISTICS

Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (10HR)	8Ah	
Cold Cranking Performance Amps@0°F (-18°C)	85A	
Dimension (±2mm)	Length	135mm (5.31inches)
	Width	75mm (2.95inches)
	Container Height	123mm (4.84inches)
	Total Height	123mm (4.84inches)
Battery (with acid)	Approx Weight	2.55kg (5.62lbs)
Terminal type	B	
Battery type	Factory Activated Series	
Constant-Voltage Charge:		
Initial charging current	Less than $0.3C_{10}$	
Voltage	14.40V~15.00V at 25°C (77°F)	
Charging time	15~18h	
Constant-Current Charge:		
Charging current $0.1C_{10}$, when charging voltage up to 14.40V, continue to charge 4h		
Floating Charge		
Initial charging current	Unlimited	
Voltage	13.50V~13.80V at 25°C (77°F)	
Capacity affected by Temperature	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%

Discharge Characteristics (25°C, 77°F)

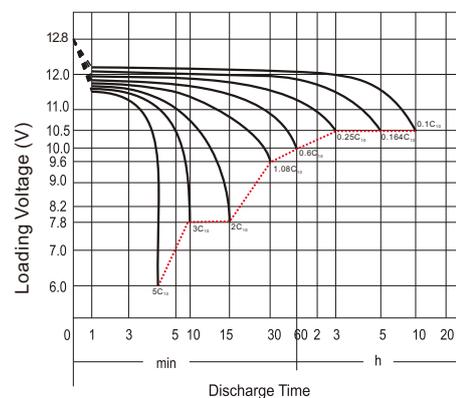

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu